

ADLS-80 series

80W Enclosed Type Switching Power Supply



■ Features:

- Constant voltage design
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage /Over Temperature
- Cooling by free air convection
- Compact size
- Low price



ELECTRICAL SPECIFICATION

MODEL	ADLS-80-12	ADLS-80-24
OUTPUT		
Rated Voltage	12V	24V
Rated Current	6.7A	3.35A
Rated Power	80W	
Voltage Adjustment – potentiometer VIP1	10.8 ÷ 13.2V	21.6 ÷ 26.4V
Line Regulation	± 1%	
Load Regulation	± 2%	
Tolerance [3]	± 5%	
Ripple & Noise (max.) [2]	320mV _{p-p}	
Setup, Rise Time [4]	500ms, 30ms / 230VAC at full load	
Hold up Time	30ms / 230VAC at full load	
INPUT		
Voltage Range	140 ÷ 264VAC	
Frequency Range	47 ÷ 63Hz	
Efficiency (typ.)	82%	
AC Current (typ.)	1.3A / 115VAC, 0.7A / 230VAC	
PROTECTIONS		
Overload	Range: 105 ÷ 150% of rated current Type: hiccup mode, auto-recovery.	
Short Circuit	Type: hiccup mode, auto-recovery.	
Over voltage	Range: 105 ÷ 150% of rated voltage Type: hiccup mode, auto-recovery.	
Over Temperature	Range: 110°C ± 10°C (detect by main IC) Type: hiccup mode, auto-recovery.	

ADLS-80 series

80W Enclosed Type Switching Power Supply



WORKING ENVIRONMENT

Working Temperature	-20°C ÷ 50°C
Working Humidity	20 ÷ 90% RH non-condensing
Storage Temperature and Humidity	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing

SAFETY AND EMC REGULATIONS

Safety Standards	Compliance to EN61347-1, EN61347-2-13, IP67
Withstand Voltage	I-P/O-P: 1.5kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS



Lifetime	12 000Hrs for input 230VAC, 20°C ambient temperature, full load
Dimensions	160 x 41 x 32mm (L x W x H)
Weight and Packing	0.19kg; 100pcs./ctn; ctn weight and dimensions: 16.5kg; 46 x 39.3 x 27cm

EAN Code



1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

MECHANICAL SPECIFICATION

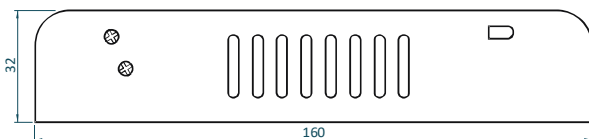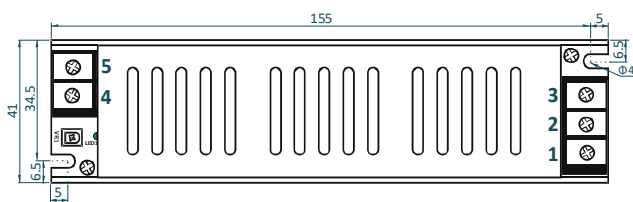

TERMINAL PIN NO. ASSIGNMENT

PIN No.	Assignment	PIN No.	Assignment
1	Frame Ground: GND	4	Output: +V
2	Input: AC/N	5	Output: -V
3	Input: AC/L	VR1	Output voltage adjustment
		LED1	Power On indicator

DERATING CURVE

